

Colours

To appreciate the slight colour variation inherent in firing natural products we recommend that you view a mix of the product. Our sample despatch service is available to assist you in finalising your choice.



CHEVREUSE



MILLESIME



RED ETNA



RED NUANCE



TERRE DE BEAUCE



BROWN



This product has been manufactured in accordance with an organisation certified as compliant by AFNOR certification, to ISO 9001 for quality, ISO 14001 for the environment and ISO 50001 for energy. All EDILIANS clay tiles comply with the requirements of standard NF EN 1304. Only the tile models identified by the NF, NFM or NFFP logo comply with the requirements of the NF063 clay tiles Mark standard. The characteristics certified by the NF clay tiles mark are the appearance, the geometric characteristics, the resistance to breakage by bending, the impermeability (class 1), the resistance to freezing according to NF EN 539-2, the resistance to freezing "mountain climate" (only for models identified by the NFM logo) the possibility of being used on low-slope roofs (only by the NF FP logo).
www.marque-nf.com

EDILIANS
Email :
serviceclients.exp@edilians.com

edilians.eu

This documentation cancels and replaces previous editions. This document has a non-contractual value and is in particular likely to be modified at any time (see the updated information on the product sheet on the www.edilians.com site). The photographs correspond to presentation suggestions and have a non-contractual value. Edilians S.A.S., with capital of € 161,227,700, RCS Lyon B 449 354 224, and registered office at 65, Chemin du Moulin Carron, 69570 Dardilly, France. Made by © 09-2022 C'OUTKOM for the design, creation and layout, located Impasse de la Forge - 69400 Arnas. Printed by ID IMPRIMERIE DECOMBAT, located at 25, rue Georges Charpak - Zone des Montels - 63118 Cebazat. / © 2021 EDILIANS. All other rights reserved.

PLAIN TILE 17X27 Ste Foy

A TILE FOR ALL APPLICATIONS

Plain tile


Ref. 501



- Millésime Color : rustic finish with irregular lengths
- Natural clay
- Wide range of colors
- Easy to install



OUR SOLUTIONS
edilians.eu

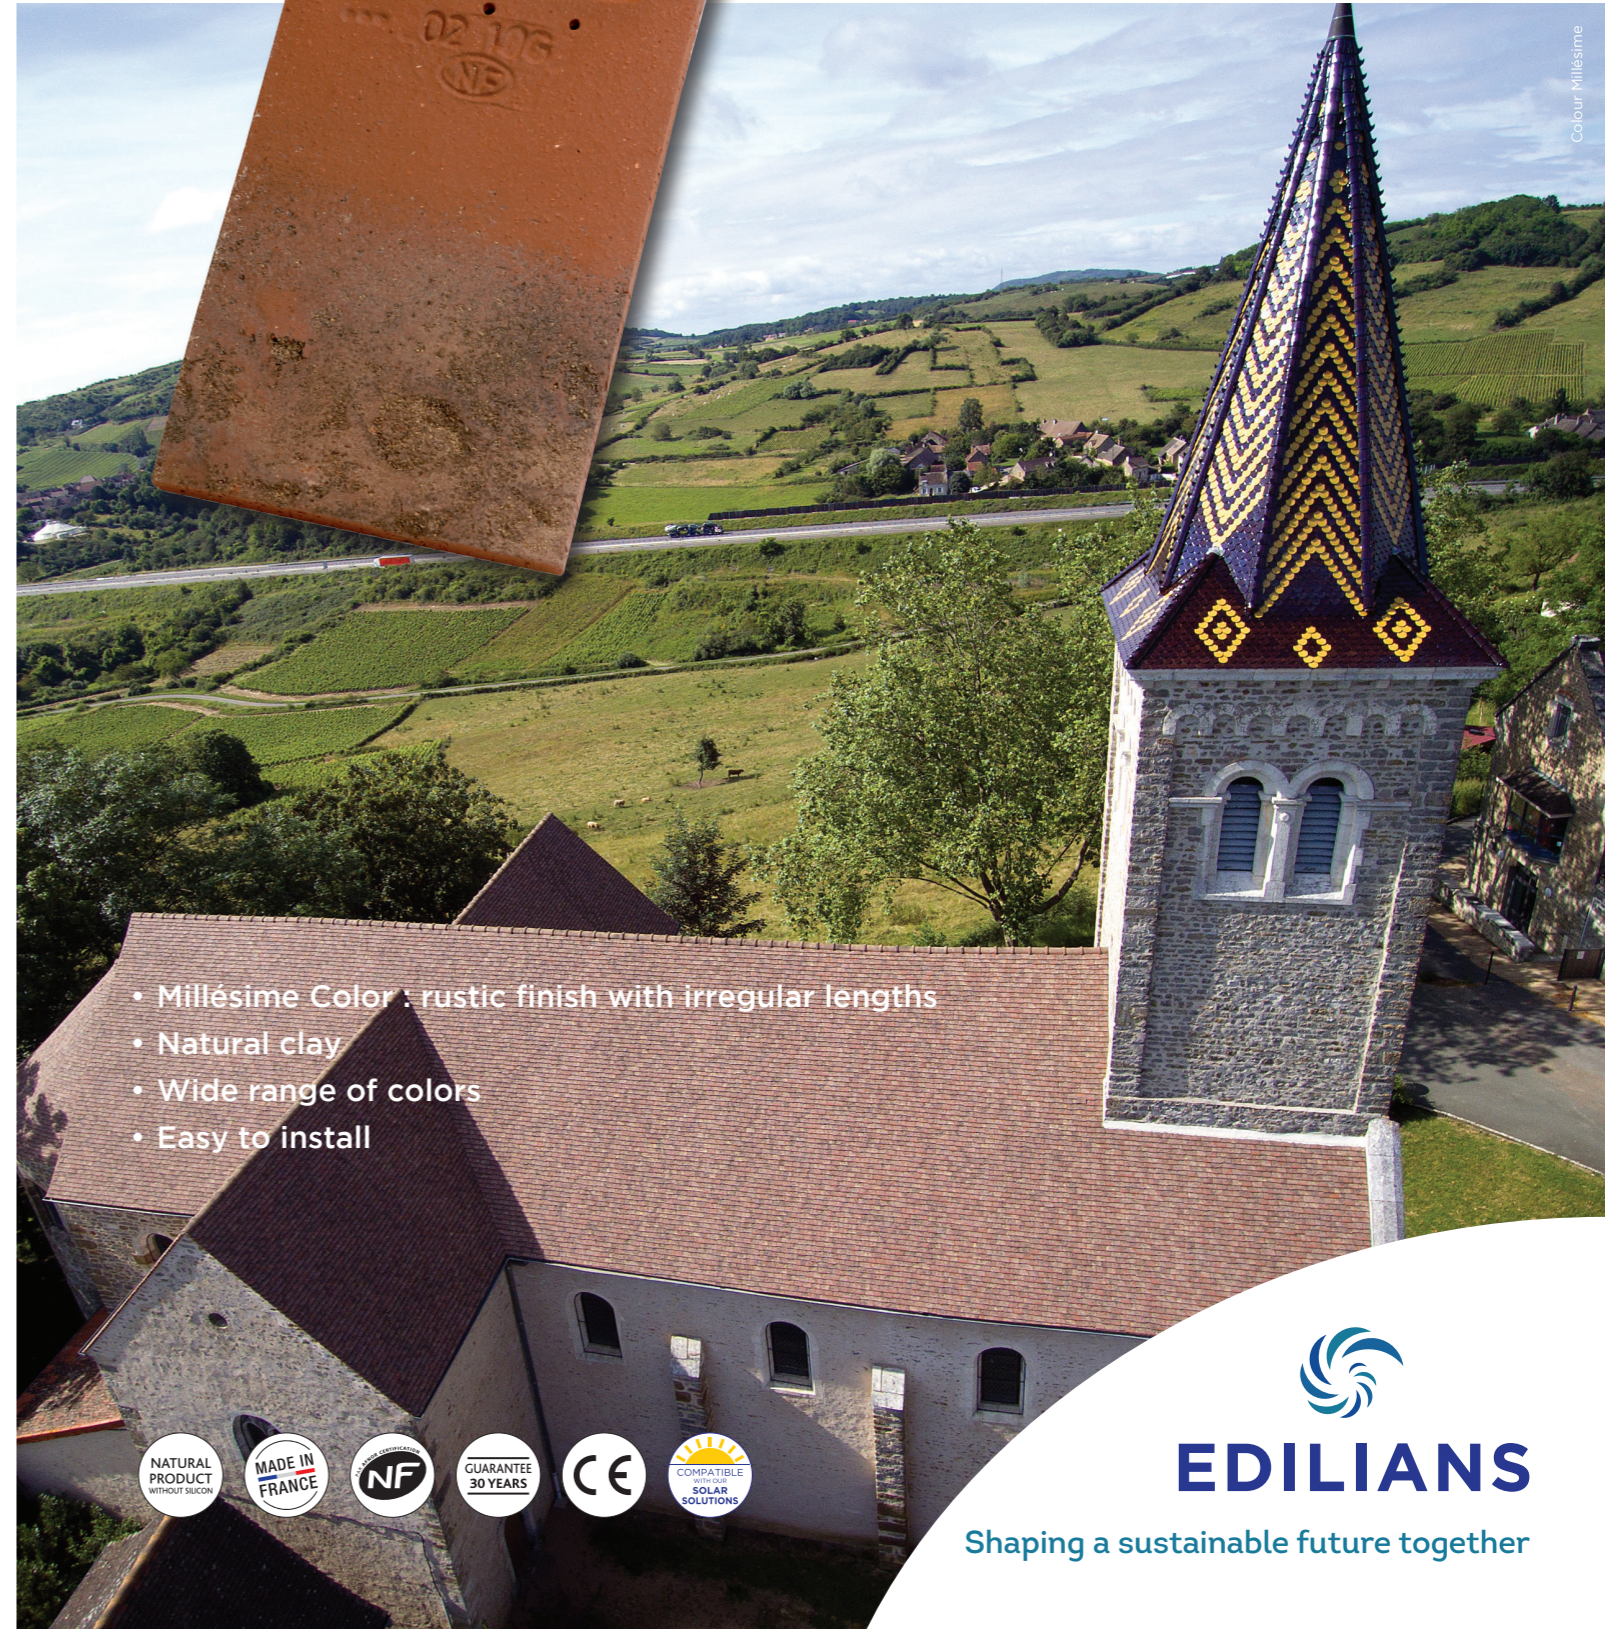

EDILIANS

Shaping a sustainable future together


PLAIN TILE 17X27

Ste Foy


Plain tile

TRANVERSAL CUTS AT BATTEN LEVEL


Installation with overhanging verges (50mm maximum)

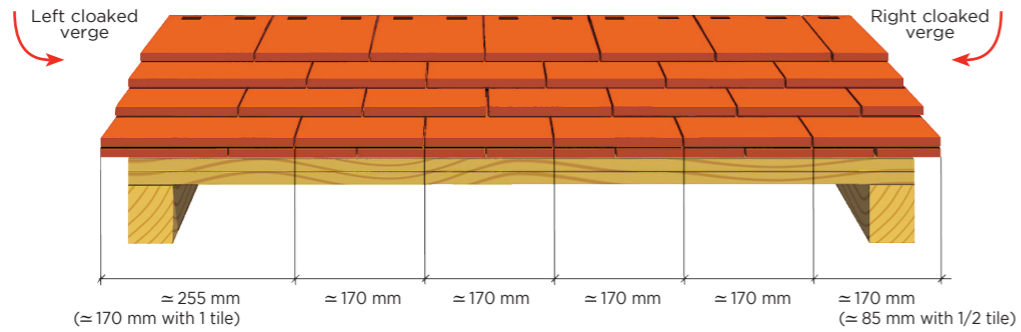

Installation with independent cloaked verge

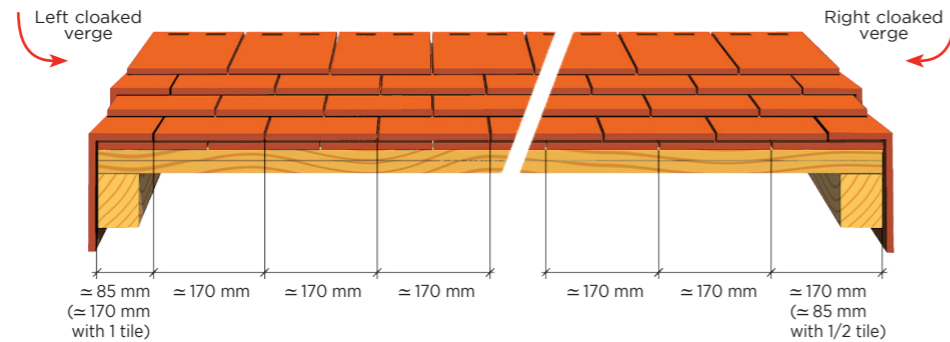

GAUGING

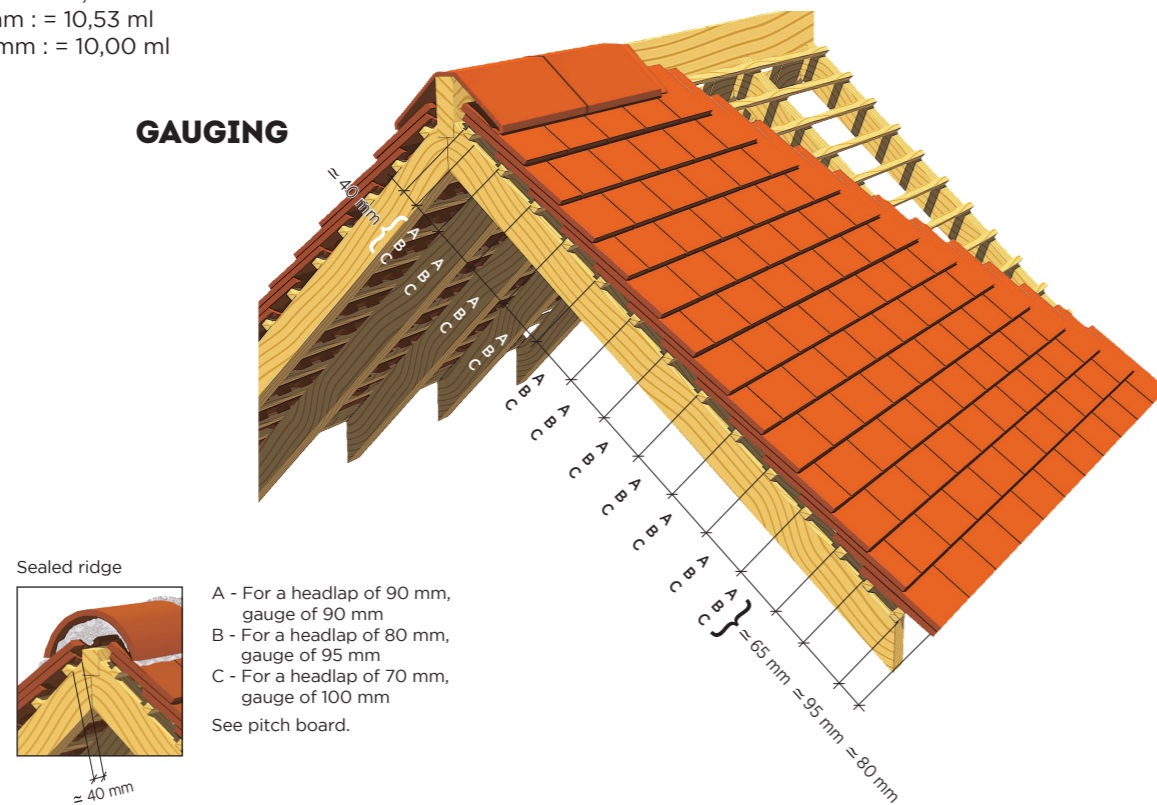

- A - For a headlap of 90 mm, gauge of 90 mm
- B - For a headlap of 80 mm, gauge of 95 mm
- C - For a headlap of 70 mm, gauge of 100 mm

See pitch board.

Characteristics


- Factory:** Ste-Foy-l'Argentière
- Length overall:** ≈ 272 mm
- Width overall:** ≈ 170 mm
- Working width:** ≈ 170 mm
- Thickness:** 15,7 mm
- Coverage per m²:**
 - nominal gauge of 90 mm : ≈ 65
 - nominal gauge of 95 mm : ≈ 62
 - nominal gauge of 100 mm : ≈ 59

- Nominal gauge:** 90, 95 or 100 mm considering headlap
- Lineary meters per m² of covering:**
 - at minimal gauge of 90 mm : = 11,11 ml
 - at minimal gauge of 95 mm : = 10,53 ml
 - at minimal gauge of 100 mm : = 10,00 ml


- Unit weight:** ≈ 1,2 kg
- Weight per m²:** 70,8 to 78 kg considering the coverage
- Quantity per pallet:** 720 tuiles
- DTU Implementation :** 40-23
- Laid:** broken-bonded

ACCESSORIES


Accessories

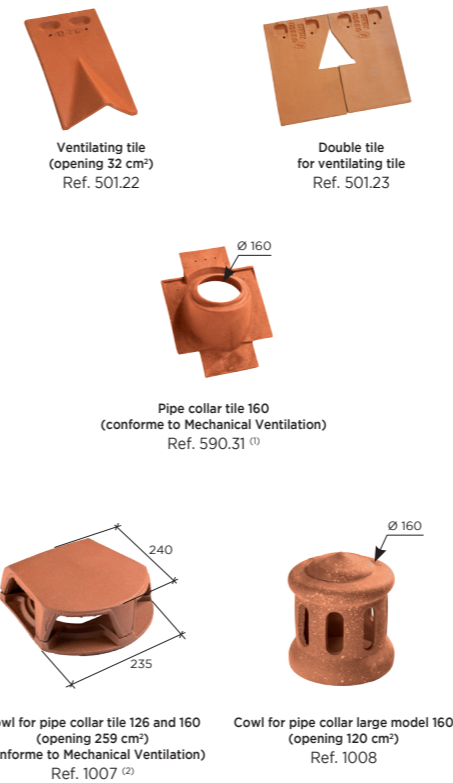

Verge components

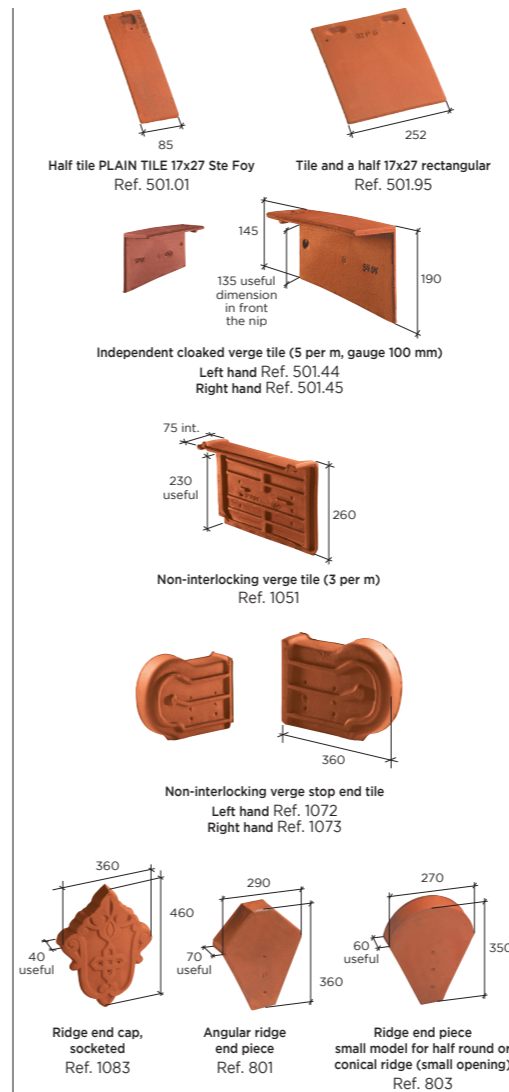

Ridge components

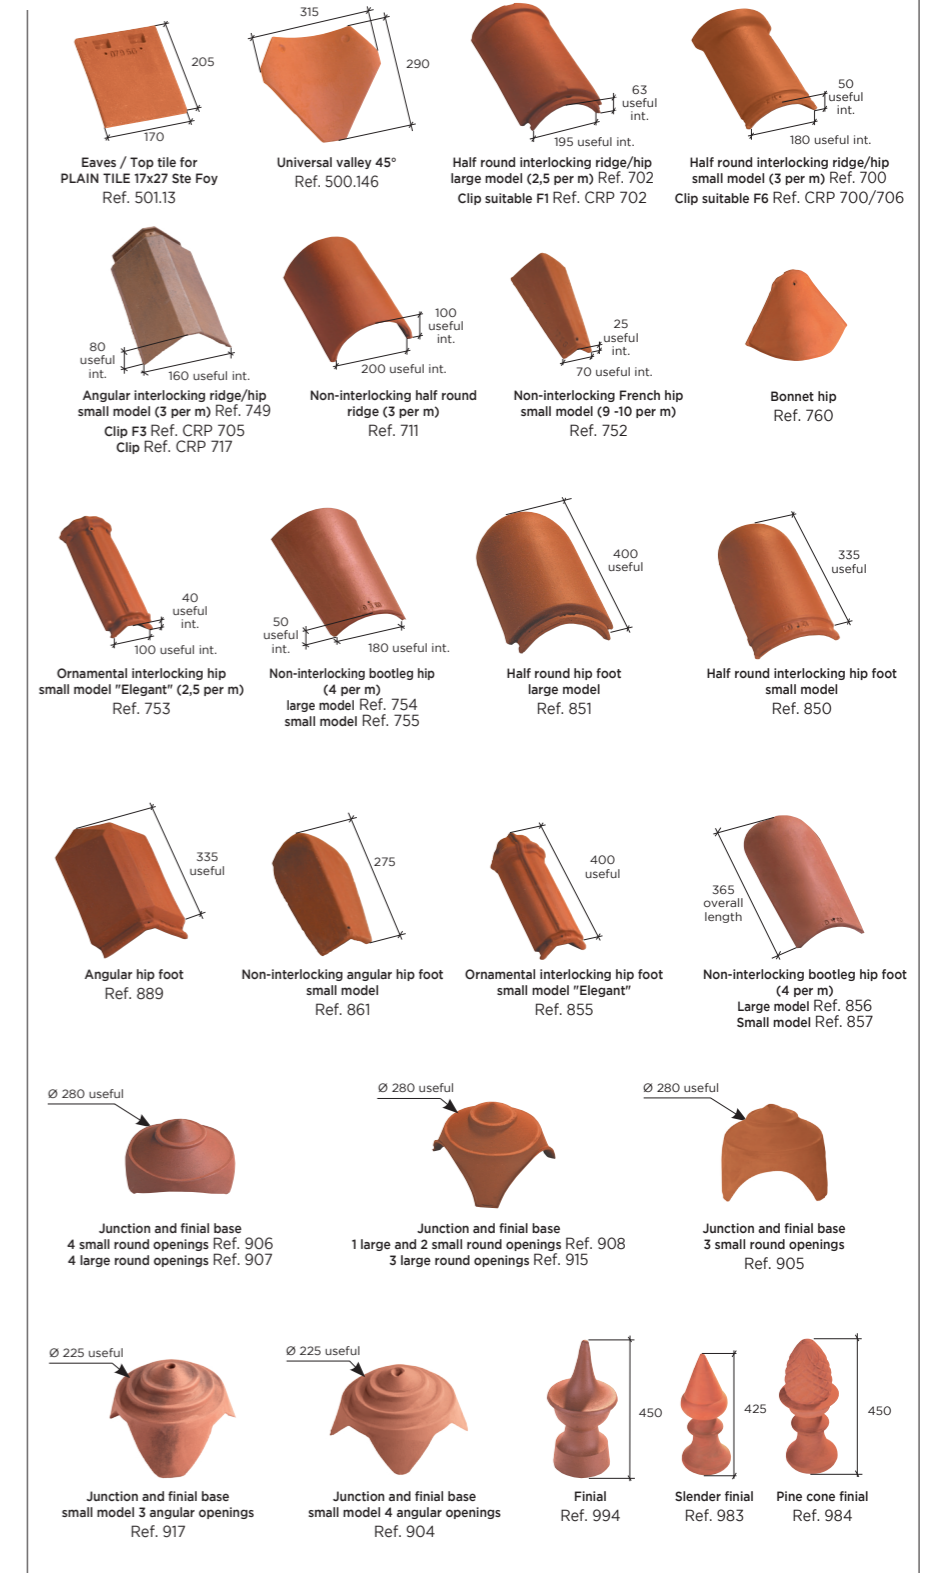

Functional accessories



(1) Mandatory installation with Metal notches, following the recommended instructions delivered on the technical documentation.
 (2) VMC: pressure loss lower than 25 Pa for an airflow of 200 m³/h, following the requirements of DTU 68.3 and CPT 3615.
 (3) Installation limited to 3 units and 2 successive rows.

For color compatibility by accessory, please visit our website.